


Necessary Valve Specs

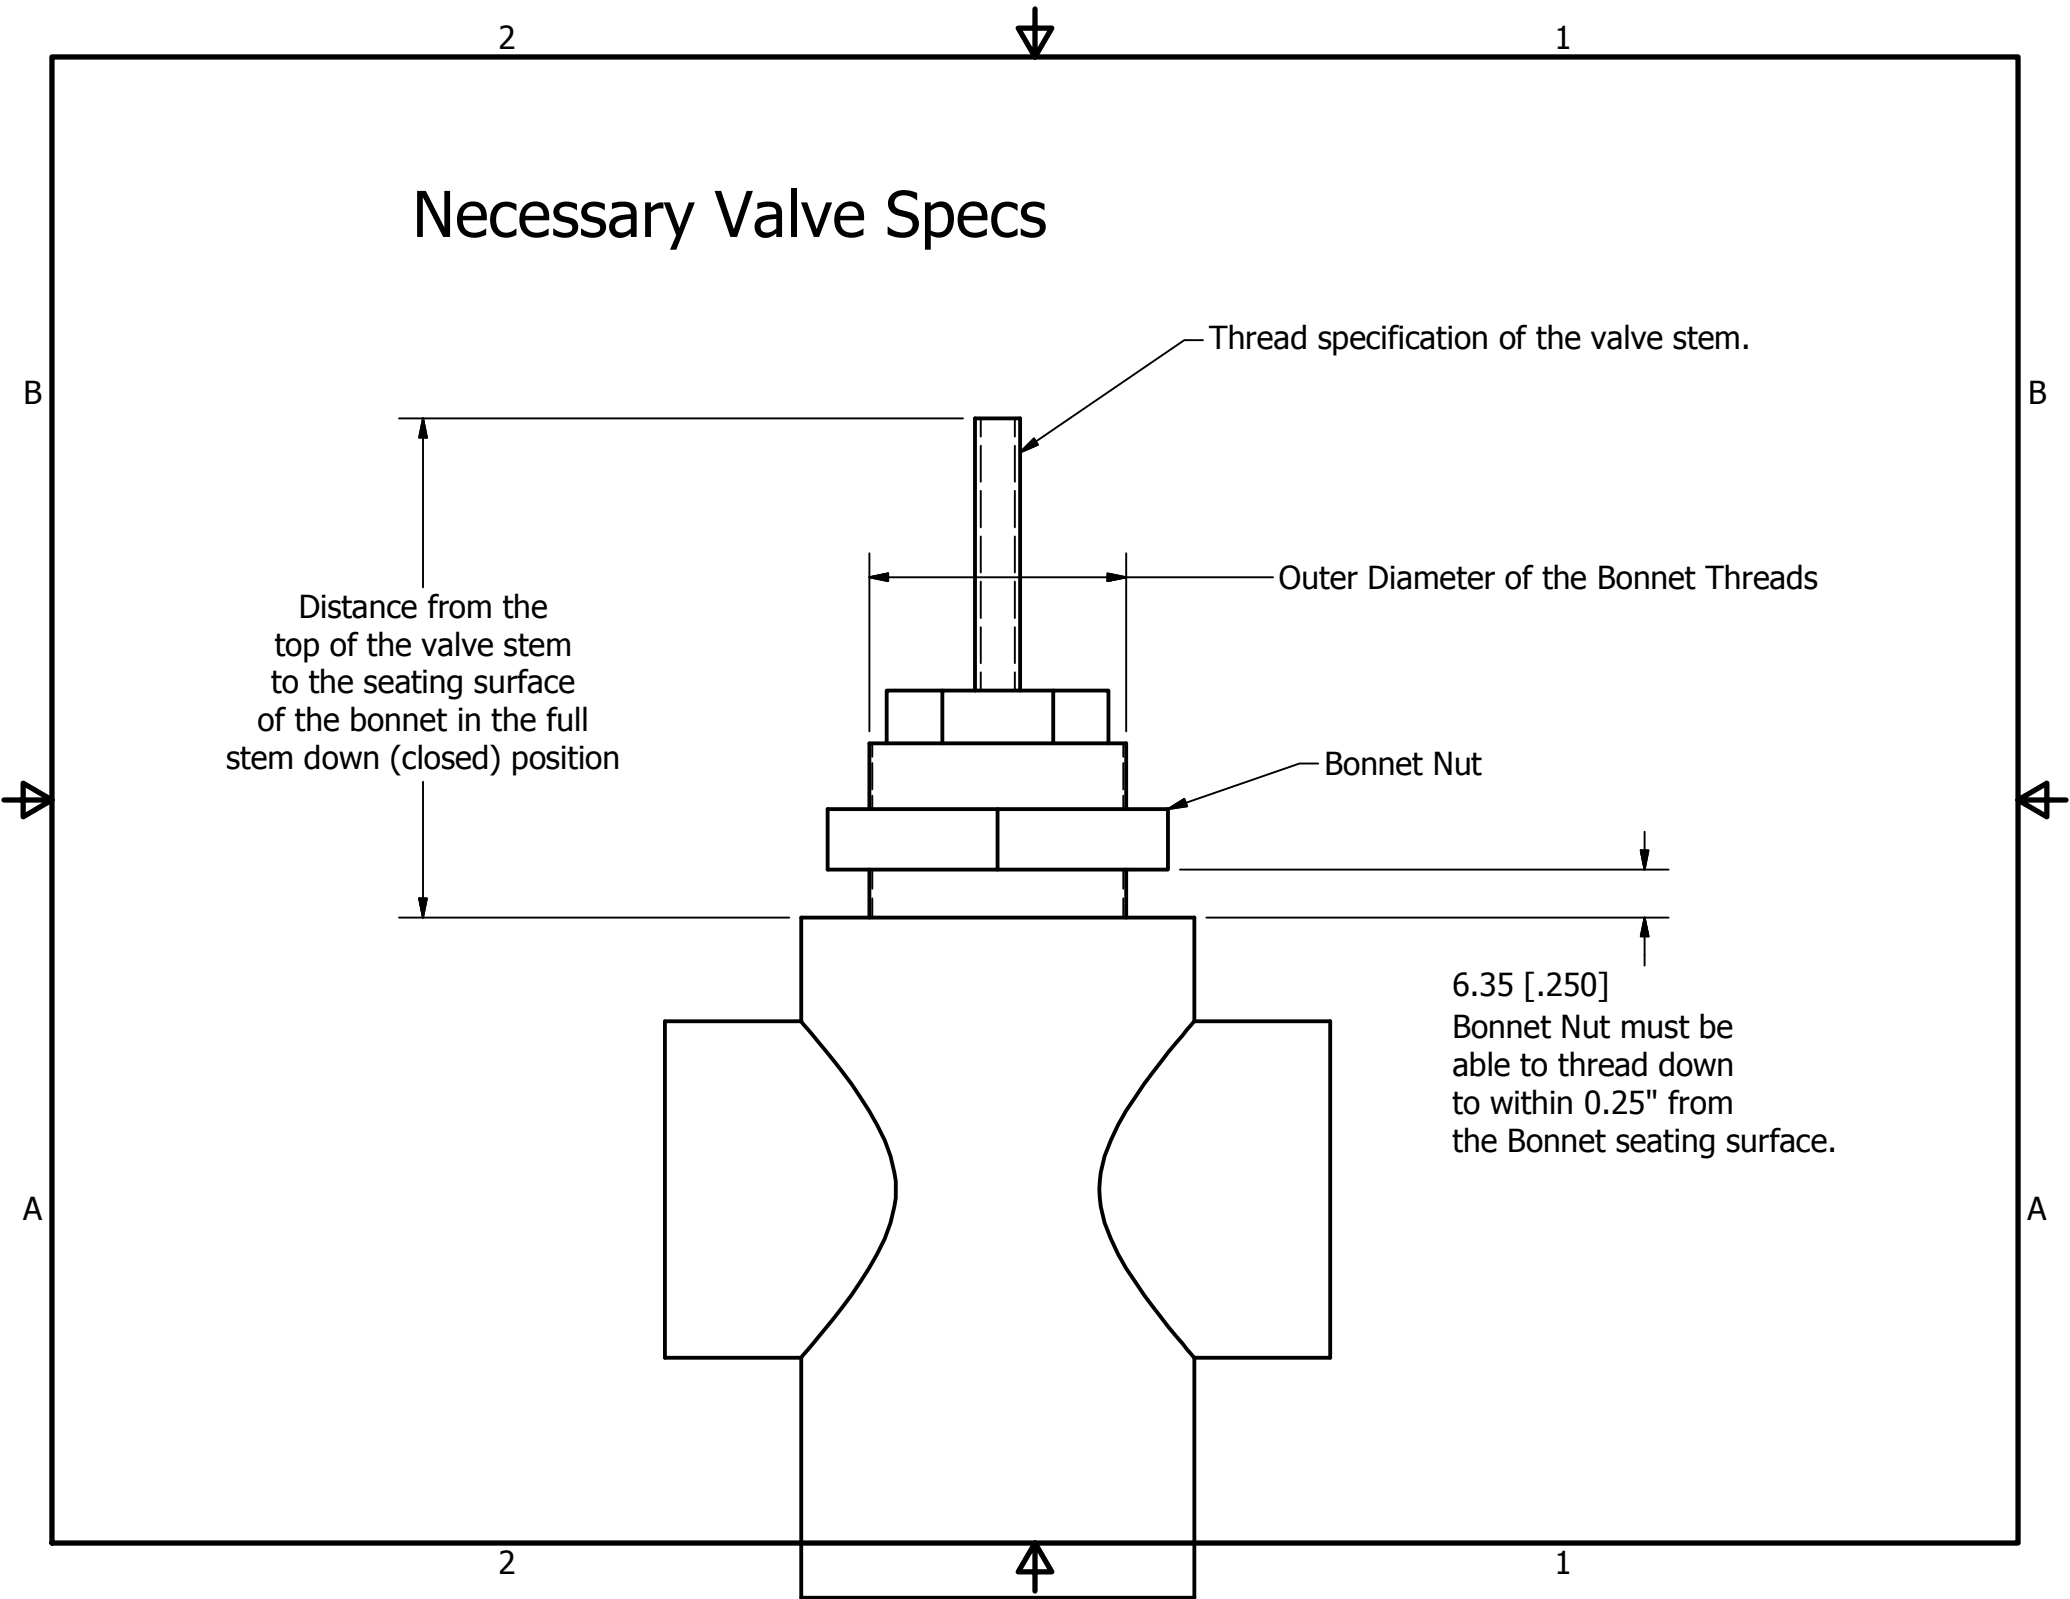

Distance from the top of the valve stem to the seating surface of the bonnet in the full stem down (closed) position

Thread specification of the valve stem.

Outer Diameter of the Bonnet Threads

Bonnet Nut

6.35 [.250]
Bonnet Nut must be able to thread down to within 0.25" from the Bonnet seating surface.